


VIDEO CONFERENCING

& telepresence mounting solutions

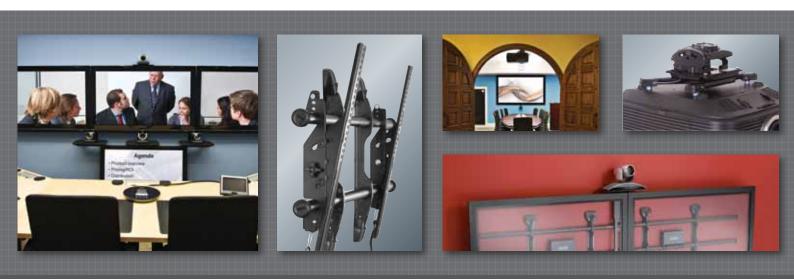

Chief's suite of Video Conferencing and Telepresence mounting solutions and accessories were engineered to support the wide variety of equipment required for these applications. Exclusive features, fast installation, and fully configurable designs provide state-of-the-art technology integration for this growing market.

www.chiefmfg.com



CONFIGURATIONS

Video Conferencing Systems

Chief provides fully configurable mounting systems to create custom Video Conferencing and Telepresence suites. Having the right system, with mounts and accessories that integrate seamlessly is key to creating a fully functional video conferencing solution.

CHOOSING A DISPLAY MOUNT

Chief has a wide variety of display mounts with differing functionality. Options include Fixed, Tilt, Swing Arm, or Mobile Carts & Stands.



FUSION Fixed & Tilt Mounts

FUSION is one of the most flexible mounting systems on the market. A suite of accessories work with the mount for a fully integrated solution.

- Fine tune adjustments after installation
- Level and height-adjust the entire configuration



Swing Arm Mounts

Use a Swing Arm Mount when you need flexible position of the flat panel TV. Chief's Swing Arms are compatible with a variety of component and speaker accessories.



Mobile Carts & Stands

Get complete mobility with these mobile carts and stands. A brought collection of accessories allows complete customization.



Configure your video conferencing solution according to project requirements by adding the right mix of accessories to the mount. For more information on the features and benefits of Chief's mounting solutions, visit www.chiefmfg.com.

WELCOME! Sales Conference 2007 se check in at the registral

desk to pick up your name and conference materials.

ning session is located in

VIDEO CONFERENCING

ADDING COMPONENTS


Chief designed a number of unique accessories, specifically for mounting codecs, set tops, cameras, CPUs and other components. Engineered to fit with the most common video conferencing brands, Chief's line of component accessories integrate seamlessly with the mount.

CONFIRM EQUIPMENT COMPATIBILITY

Chief offers a full set of CAD, DWG and manuals for each mount and accessory, showing 1:1 overall dimensions and views. Download directly from the Chief website at www.chiefmfg.com.



- FVS200[™]/FVS250[™] 8" and 12" VC Shelves - above
 - FCA102[™] CAT 5/Surge CPU Adapter
- 3 FCS100™ Single Component Shelf
- 4 FCD100™ Additional Component Shelf - below
- FCC100™ Center Channel Speaker Adapter
- 6 FLR100™ Left/Right Speaker Adapter
- FCK008™/FCK016™ 8" and 12" Connector Kits

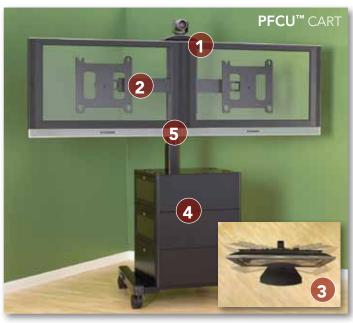

- 1 PAC715™ VC Shelf
- PAC722[™]/MAC722[™]
 Side-by-side Dual Display
- PAC790[™]/MAC790[™] Swivel Adapter
- PAC735™ (A/B/C)
 Stackable Secure Storage
 Cabinet
- 5 PAC784™ Height Assist

OTHER ACCESSORIES

PAC720[™]/MAC720[™] Vertical Dual Display PACCC1™ Center Channel Speaker Adapter FLR100™ Left/Right Speaker Adapter

PAC730[™] (A/B/C) Secure Storage Shelf PAC251[™]/
MAC251[™]
Media Adapter

PAC770[™]/PAC775[™] Heavy-Duty/Outdoor Casters

OTHER ACCESSORIES

FVS100[™]/FV1250[™] 8" and 12" VC Shelves - below

- below

es 8" and 1

FVS300™/FVS350™

8" and 12" VC Shelves - between two screens




WWW.MOUNTBUILDER.COM

Configure custom video conferencing solutions with MountBuilder – Chief's exclusive online product configurator.

- View configuration as you build
- Auto-calculates weight capacity and more
- Provides PDF outputs

Fusion Fixed & Tilt Mounting Systems

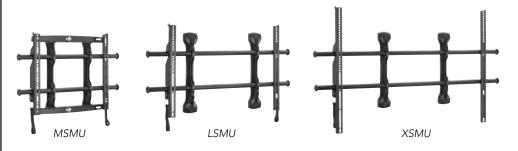

SPECIFICATIONS

Model	TV Range	Depth from Wall	Lateral Shift*	Weight Capacity
MSMU™	26 - 47"	1.96" (50 mm)	14.5" (368 mm)	125 lbs (56.7 kg)
LSMU™	37 - 63"	1.96" (50 mm)	17.5" (445 mm)	200 lbs (90.7 kg)
XSMU™	55 - 75"	1.96" (50 mm)	23.5" (597 mm)	250 lbs (113 kg)

NOTE: Tilt models also available.

*Varies with screen mounting pattern and stud placement.

ACCESSORIES FVS200™/FVS250™ 8" and 12" VC Shelves - above FVS300™/FVS350™ 8" and 12" VC Shelves - between FVS100™/FV1250™ 8" and 12" VC Shelves - below FCK008™/FCK016™

8" and 12" Connector Kits

Mobile Carts & Stands



SPECIFICATIONS

Model	TV Range	Tilt	Height Adjustment	Weight Capacity
MFCU™	30 - 55"	±15	4 - 6 ft (1.2 - 1.8 m)	125 lbs (56.7 kg)
MF1U™	30 - 55"	±15	4 - 7 ft (1.2 - 2.1 m)	125 lbs (56.7 kg)
PFCU™	42 - 71"	±15	4 - 6 ft (1.2 - 1.8 m)	200 lbs (90.7 kg)
PF1U™	42 - 71"	±15	4 - 7 ft (1.2 - 2.1 m)	200 lbs (90.7 kg)



Swing Arm Wall Mounts

CHIEF MANUFACTURING

	SPECIFICATIONS					
Мо	odel	TV Range	Extension	Weight Capacity		
M۱	WRU™	30 - 55"	24.88" (632 mm)	200 lbs (90.7 kg)		
PN	IRU™	42 - 71"	24.88" (50 mm)	200 lbs (90.7 kg)		
MI	WRFU™	30 - 55"	9.9" (251 mm)	125 lbs (56.7 kg)		
PIV	WRFU™	42 - 71"	15" (381 mm)	200 lbs (90.7 kg)		



PIWRFU

■ A DIVISION OF MILESTONE AV TECHNOLOGIES ■ www.chiefmfg.com

PNRU

Milestone AV Technologies B.V. ■ P +31 (40) 23 24 700 ■ F +31 (40) 23 24 710 ■ europe.chief@milestone.com Milestone AV Technologies Ltd ■ P +852 2145 4099 ■ F +852 2145 4477 ■ asia.chief@milestone.com